

Silicate Injection Grouts

WEBAC® 2061



- ▶ WEBAC® 2061 is a low viscosity silicate injection solution for stabilizing soil and masonry.

Range of application


- Filling, solidification and stabilization of non-binding to low binding types of soil
- Solidification of masonry and porous natural stone constructions

Properties

- Low viscosity
- Water resistant
- Resistant to common soil minerals

Example

Meaning of the icons ▶ WEBAC Product Catalog, www.webac.de or www.webac-grouts.com

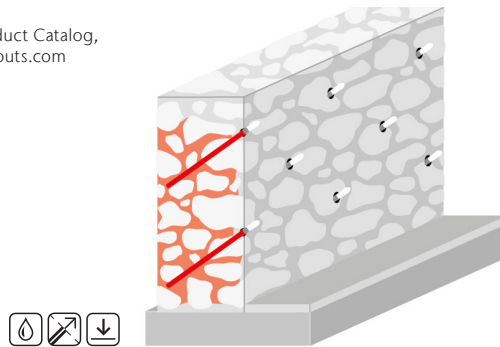

Solidification of masonry

WEBAC-Chemie GmbH
Fahrenberg 22
22885 Barsbüttel
Germany
Tel. +49 40 67057-0
Fax +49 40 6703227
info@webac.de

www.webac.de

▶ Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products. © WEBAC-Chemie GmbH. Version 03/17

Silicate Injection Grouts

WEBAC® 2061

Technical data	Values	
Mixing ratio	10 : 1 parts by volume	
Density, 20 °C / 68 °F (ISO 2811)	Comp. A Comp. B	≈ 1.3 g/cm ³ ≈ 1.2 g/cm ³
Pot life	20 °C / 68 °F ≈ 15 min (solidified after ≈ 25 min)	
Application temperature Building structure and material	> 10 °C / 50 °F	
Viscosity of mixture	23 °C / 73 °F ≈ 20 mPa·s	12 °C / 54 °F ≈ 35 mPa·s
Compressive cylinder strength material-sand mix, 28 d	≈ 25 N/mm ²	
Exposure scenarios according to REACH	Assessment of industry standard application	

WEBAC-Chemie GmbH
 Fahrenberg 22
 22885 Barsbüttel
 Germany
 Tel. +49 40 67057-0
 Fax +49 40 6703227
 info@webac.de

www.webac.de

The specified data are values determined under laboratory conditions and are subject to a certain fluctuation. Deviations are possible in practice depending on the respective object situation.

Silicate Injection Grouts

WEBAC® 2061



Preparatory work

Structural analysis before masonry injection:

- Masonry condition
- Moisture condition
- Masonry structure
- Salt contamination

Structural analysis before soil solidification:

- Foundation soil examination
- Soil survey
 - Soil condition
 - Ground water level
 - Flow behavior of the water

This provides following information:

- Practicability of injection
- Choice of drill hole packers or lances
- Positioning of drill holes

▶ See **WEBAC Brochure Sealing of Masonry**



Mixing

Application by 1C pump

- Empty component A and B at the given mixing ratio into a bucket (make sure that the containers are completely empty) and mix homogenously
- Transfer the mixed material to the hopper
- In case of separation, stir briefly



Application instruction

- The mixture must be used completely within 15 minutes
- Only use pure WEBAC material without any residues of cleaning agents or other impurity



Application

Masonry solidification

- The injection pressure depends on the nature and condition of the building structure
- Inject the material from bottom to top, beginning at the lower grid level
- Continue the injection until resin leaks out from the masonry and/or from the adjacent packers. This is necessary to get an even material distribution

Soil solidification

- The material is applied by injection with a 1C pump via drill holes/lances



Final work and cleaning

- Once the material has cured remove the packers
- Clean and close the drill holes with suitable non-shrinking mortar
- Cured material must be removed meachnically
- Rinse injection pump with water
- For detailed information refer to the operating manual of the injection pump used

WEBAC-Chemie GmbH
Fahrenberg 22
22885 Barsbüttel
Germany
Tel. +49 40 67057-0
Fax +49 40 6703227
info@webac.de

www.webac.de

Silicate Injection Grouts

WEBAC® 2061

Product data	
Application	Injection by 1C pump
Packing	Comp. A 255 kg
	Comp. B 22.4 kg
Storage	<ul style="list-style-type: none"> • Between 5 °C / 41 °F and 30 °C / 86 °F • Protect from moisture • In original, sealed containers
Compatibility/Resistance	Resistant to common chemical loads in building structures

WEBAC-Chemie GmbH
 Fahrenberg 22
 22885 Barsbüttel
 Germany
 Tel. +49 40 67057-0
 Fax +49 40 6703227
 info@webac.de

www.webac.de

Occupational safety

The safety regulations of the industrial trade associations and the WEBAC Safety Data Sheets are to be observed at all times when working with this product. Safety data sheets according to Regulation (EC) No. 1907/2006 (REACH) must be accessible to all persons responsible for occupational safety, health protection and the handling of materials. For further information, please see the separate information sheet "Occupational Safety" in our product catalog or www.webac-grouts.com.

Waste disposal

In Germany, empty containers can be disposed of via "Interseroh Dienstleistungs GmbH" observing the respective terms and conditions. It is not possible to dispose of containers at production facilities or delivery warehouses. For more detailed information, please see the separate information sheet "Information on the disposal and return of WEBAC packaging" in our product catalog or www.webac-grouts.com and the safety data sheets.

► Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.
 © WEBAC-Chemie GmbH. Version 03/17