

Epoxy Injection Resins

WEBAC® 4130



- ▶ WEBAC® 4130 is a special epoxy injection resin for the structural bonding of wet and oil-contaminated crack edges.

Range of application

- Crack repair according to EN 1504-5:2013
- Repair of foundations in wind power plants
- Adhesive bonding between existing and new concrete

Properties


- Structural bonding specially for wet cracks
- Suitable for use at low temperatures
- High toughness
- Suitable for oil-contaminated crack edges
- Total solid*

WEBAC-Chemie GmbH
 Fahrenberg 22
 22885 Barsbüttel
 Germany
 Tel. +49 40 67057-0
 Fax +49 40 6703227
 info@webac.de


www.webac.de

Examples

Meaning of the icons ▶ WEBAC Product Catalog,
www.webac.de or www.webac-grouts.com

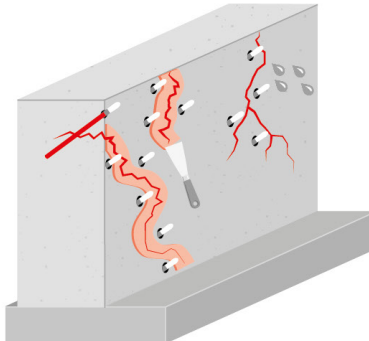

Crack repair in concrete



Repair of foundations in wind power plants

*according to test method by Deutsche Bauchemie e.V. (German Industry Association for Manufacturers of Construction Chemicals)

▶ Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.
 © WEBAC-Chemie GmbH. Version 03/17

Epoxy Injection Resins

WEBAC® 4130

Technical data	Values		
Mixing ratio	2 : 1 parts by volume		
Density, 20 °C / 68 °F (ISO 2811)	Comp. A Comp. B	≈ 1.1 g/cm ³ ≈ 1.0 g/cm ³	
Pot life		20 °C / 68 °F WEBAC® EasyPro ≈ 20 min	12 °C / 54 °F WEBAC® IP 1K-F3 ≈ 25 min ≈ 50 min
Application temperature Building structure and material	> 3 °C / 37 °F		
Viscosity of mixture		23 °C / 73 °F ≈ 700 mPa·s	12 °C / 54 °F ≈ 1,750 mPa·s
Tensile strength on concrete 14 d, 21 °C / 70 °F (EN 12618-2)	wet	≈ 3.8 N/mm ²	
Compressive strength 7 d, 21 °C / 70 °F (ISO 604)	≈ 85 N/mm ²		
Bending tensile strength 7 d, 21 °C / 70 °F (ISO 178)	≈ 100 N/mm ²		
Tensile strength · elongation at break 7 d, 21 °C / 70 °F (ISO 527)	≈ 50 N/mm ² · ≈ 3.3%		
E modulus 7 d, 21 °C / 70 °F (ISO 527)	≈ 2,500 N/mm ²		
Tensile strength development (ISO 1543)		5 °C / 41 °F, 40 h ≈ 7.0 N/mm ²	21 °C / 70 °F, 9 h ≈ 6.0 N/mm ²
Shore hardness D 7 d, 21 °C / 70 °F (EN 868)	≈ 84/78		
Features (according to EN 1504-5:2013)	U(F1) W(5) (3) (5/30)		
Fire behavior	B2 according to DIN 4102-4. 2.3.2		
GISCODE	RE1		
EPD	EPD-DBC-20130015-IBE1-DE		
Exposure scenarios according to REACH	Assessment of industry standard application		

WEBAC-Chemie GmbH
Fahrenberg 22
22885 Barsbüttel
Germany
Tel. +49 40 67057-0
Fax +49 40 6703227
info@webac.de

www.webac.de

The specified data are values determined under laboratory conditions and are subject to a certain fluctuation. Deviations are possible in practice depending on the respective object situation.

Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.
© WEBAC-Chemie GmbH. Version 03/17

Epoxy Injection Resins

WEBAC® 4130



Preparatory work

- ▶ See **WEBAC Brochure Crack Repair**



Crack Repair



Mixing

Application by 1C pump

- Empty component A and B at the given mixing ratio into a bucket (make sure that the containers are completely empty) and mix homogeneously
- Transfer the mixed material to the hopper



Application instruction

- The mixture must be used completely within the specified pot life
- Only use pure WEBAC material without any residues of cleaning agents or other impurity
- The reaction speed is influenced by the temperature of the material and the building structure – higher temperatures accelerate, lower temperatures slow down the reaction

Due to the heat development of the injection pump, the pot life of the material may be reduced. Once the material is noticeable warm, it must either be used immediately or removed from the hopper and pump.



Application

- The injection pressure depends on the nature and condition of the structure, start the injection by filling the lowest crack areas first
- In the case of horizontal cracks, carry out the injection from one side in order to avoid air inclusions
- Continue the injection until resin leaks out from the adjacent packers. This is necessary to get an even material distribution
- When injecting the last packer check the ventilation hole for apparent resin
- A secondary injection should be carried out within the gelling phase of the material (up to approx. 30 min after end of the pot life)



Final work and cleaning

- The patching can be removed as soon as the injection process is completed and the filling material is cured
- Close the drill holes with suitable non-shrinking mortar and re-profile the surface
- Clean the pump with **WEBAC® Cleaner A**
- Use **WEBAC® Cleaner B** for dissolving cured material but never for rinsing pumps
- Observe the technical data sheets of the injection pump and cleaners used
- For detailed information refer to the operating manual of the injection pump used

WEBAC-Chemie GmbH
Fahrenberg 22
22885 Barsbüttel
Germany
Tel. +49 40 67057-0
Fax +49 40 6703227
info@webac.de

www.webac.de

▶ Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.
© WEBAC-Chemie GmbH. Version 03/17

Epoxy Injection Resins

WEBAC® 4130

Product data

Application	<ul style="list-style-type: none"> • Injection by 1C pump • Strong heat development – only mix small quantities! 	
Packing	Comp. A 11 kg	Comp. B 5 kg
Storage	<ul style="list-style-type: none"> • Between 8 °C / 46 °F and 25 °C / 77 °F • Protect from moisture • In original, sealed containers 	
Compatibility/Resistance	<ul style="list-style-type: none"> • Compatible with concrete, steel, foil, cable sheathing and WEBAC injection materials • Resistant to harmful salts, alkalis and acids in common concentrations in building structures 	

WEBAC-Chemie GmbH
 Fahrenberg 22
 22885 Barsbüttel
 Germany
 Tel. +49 40 67057-0
 Fax +49 40 6703227
 info@webac.de

www.webac.de

Test certificate

- Test certificate* according to KTW recommendations: D1 (large sealing of surfaces)

Occupational safety

The safety regulations of the industrial trade associations and the WEBAC Safety Data Sheets are to be observed at all times when working with this product. Safety data sheets according to Regulation (EC) No. 1907/2006 (REACH) must be accessible to all persons responsible for occupational safety, health protection and the handling of materials. For further information, please see the separate information sheet "Occupational Safety" in our product catalog or www.webac-grouts.com.

Waste disposal

In Germany, empty containers can be disposed of via "Interseroh Dienstleistungs GmbH" observing the respective terms and conditions. It is not possible to dispose of containers at production facilities or delivery warehouses. For more detailed information, please see the separate information sheet "Information on the disposal and return of WEBAC packaging" in our product catalog or www.webac-grouts.com and the safety data sheets.

* for drinking water

► Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.
 © WEBAC-Chemie GmbH. Version 03/17