

WEBAC® Impact Profiles EPDM



► WEBAC® Impact Profiles EPDM are used for sealing joints.

Range of application


- Sealing of structural elements and movement joints
- Suitable as end profile for joints

Properties

- 100% closed-cell EPDM foam
- Good heat resistance
- Good workability also at low temperatures
- High weathering, chemical, UV and ozone resistance

Example

Meaning of the icons ► WEBAC Product Catalog, www.webac.de or www.webac-grouts.com

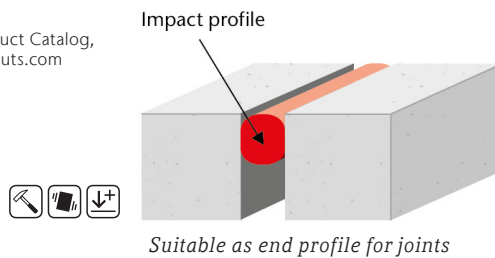

WEBAC-Chemie GmbH
Fahrenberg 22
22885 Barsbüttel
Germany
Tel. +49 40 67057-0
Fax +49 40 6703227
info@webac.de

www.webac.de

Technical data

	Values	
Profile shape	Round profile	Ø 20 mm, Ø 25 mm, Ø 30 mm, Ø 35 mm, Ø 40 mm, Ø 45 mm, Ø 50 mm
Density		≈ 0.55 g/cm ³
Tensile strength		≥ 3 N/mm ²
Elongation at break		≥ 150%
Shore hardness A		≈ 20 +/- 5
Surface texture		even
Color		greyish black

The specified data are values determined under laboratory conditions and are subject to a certain fluctuation. Deviations are possible in practice depending on the respective object situation.

► Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products. © WEBAC-Chemie GmbH. Version 03/17

Special Construction Products

WEBAC® Impact Profiles EPDM

Product data																	
Installation	<ul style="list-style-type: none"> Manually or mechanically with a special chisel hammer The profile size should exceed the joint width by approx. 30% 																
Packing	<table border="1"> <thead> <tr> <th>Dimension</th> <th>Unit</th> </tr> </thead> <tbody> <tr> <td>Ø 20 mm</td> <td>25 m</td> </tr> <tr> <td>Ø 25 mm</td> <td>25 m</td> </tr> <tr> <td>Ø 30 mm</td> <td>20 m</td> </tr> <tr> <td>Ø 35 mm</td> <td>20 m</td> </tr> <tr> <td>Ø 40 mm</td> <td>20 m</td> </tr> <tr> <td>Ø 45 mm</td> <td>10 m</td> </tr> <tr> <td>Ø 50 mm</td> <td>10 m</td> </tr> </tbody> </table>	Dimension	Unit	Ø 20 mm	25 m	Ø 25 mm	25 m	Ø 30 mm	20 m	Ø 35 mm	20 m	Ø 40 mm	20 m	Ø 45 mm	10 m	Ø 50 mm	10 m
Dimension	Unit																
Ø 20 mm	25 m																
Ø 25 mm	25 m																
Ø 30 mm	20 m																
Ø 35 mm	20 m																
Ø 40 mm	20 m																
Ø 45 mm	10 m																
Ø 50 mm	10 m																
Storage	Dry and protect from mechanical damage																

WEBAC-Chemie GmbH
 Fahrenberg 22
 22885 Barsbüttel
 Germany
 Tel. +49 40 67057-0
 Fax +49 40 6703227
 info@webac.de

www.webac.de

Occupational safety

The safety regulations of the industrial trade associations and the WEBAC Safety Data Sheets are to be observed at all times when working with this product. Safety data sheets according to Regulation (EC) No. 1907/2006 (REACH) must be accessible to all persons responsible for occupational safety, health protection and the handling of materials. For further information, please see the separate information sheet "Occupational Safety" in our product catalog or www.webac-grouts.com.

Waste disposal

In Germany, empty containers can be disposed of via "Interseroh Dienstleistungs GmbH" observing the respective terms and conditions. It is not possible to dispose of containers at production facilities or delivery warehouses. For more detailed information, please see the separate information sheet "Information on the disposal and return of WEBAC packaging" in our product catalog or www.webac-grouts.com and the safety data sheets.

► Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.
 © WEBAC-Chemie GmbH. Version 03/17