

- ▶ WEBAC® Joint Finishing Profiles are used for repairing expansion joints.

## Range of application

- Sealing of movement joints
- Suitable as end profile for joints

## Properties


- TPE:
  - Flexible even at low temperatures
  - Aging resistant
  - UV-resistant
  - High elongation at break
- Nitriflex:
  - Excellent chemical resistance
  - Aging resistant
  - Permanently elastic
  - High elongation at break

WEBAC-Chemie GmbH  
Fahrenberg 22  
22885 Barsbüttel  
Germany  
Tel. +49 40 67057-0  
Fax +49 40 6703227  
info@webac.de

[www.webac.de](http://www.webac.de)


## Example

Meaning of the icons ▶ WEBAC Product Catalog,  
[www.webac.de](http://www.webac.de) or [www.webac-grouts.com](http://www.webac-grouts.com)

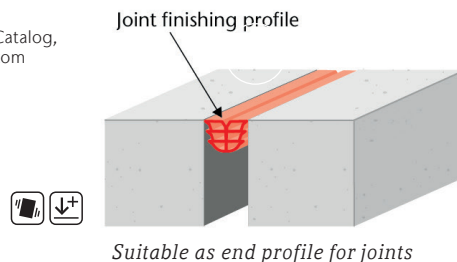

## Occupational safety/waste disposal

- ▶ Downloads on [webac-grouts.com](http://webac-grouts.com)



[webac-grouts.com/  
downloads](http://webac-grouts.com/downloads)



## ▶ Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.  
© WEBAC-Chemie GmbH. Version 03/17

Special Construction Products

## WEBAC® Joint Finishing Profiles

### Technical data

		Values	
Types of profiles	 Profile I (optional Nitriflex or TPE)	Profile width	Joint width
		25 mm	18–21 mm
		35 mm	20–24 mm
	 Profile II (optional Nitriflex or TPE)	50 mm	26–33 mm
		20 mm	13–16 mm
		30 mm	19–23 mm
	40 mm	29–33 mm	

WEBAC-Chemie GmbH  
 Fahrenberg 22  
 22885 Barsbüttel  
 Germany  
 Tel. +49 40 67057-0  
 Fax +49 40 6703227  
 info@webac.de

[www.webac.de](http://www.webac.de)

	Nitriflex	TPE
Shore hardness A	≈ 67±5	≈ 62±5
Tensile strength	≥ 10 N/mm <sup>2</sup>	≥ 10 N/mm <sup>2</sup>
Elongation at break	≥ 350%	≥ 600%

The specified data are values determined under laboratory conditions and are subject to a certain fluctuation. Deviations are possible in practice depending on the respective object situation.

### Product data

Installation	Manually or mechanically with a special chisel hammer		
Packing	Profile I (optional Nitriflex or TPE)	Profile width	Unit
		25 mm	25 m
		35 mm	25 m
	Profile II (optional Nitriflex or TPE)	50 mm	25 m
		20 mm	25 m
		30 mm	25 m
	40 mm	25 m	
Storage	Protect from mechanical damage and moisture		

## Technical Information

All the data indicated in this technical data sheet and any related information provided by our employees are of an advisory nature representing our current state of knowledge and in no way binding. As the exact chemical, technical and physical conditions of the actual application are beyond WEBAC's control, this information does not preclude examination of the products and/or procedures for the intended application and surface by the user. WEBAC is thus unable to guarantee results. The user is fully responsible for the observation of existing regulations and conditions when using the products.  
 © WEBAC-Chemie GmbH. Version 03/17